


VPC2M

Compact 2 Way Pushfit
Lever Type Connector



Technical Drawing

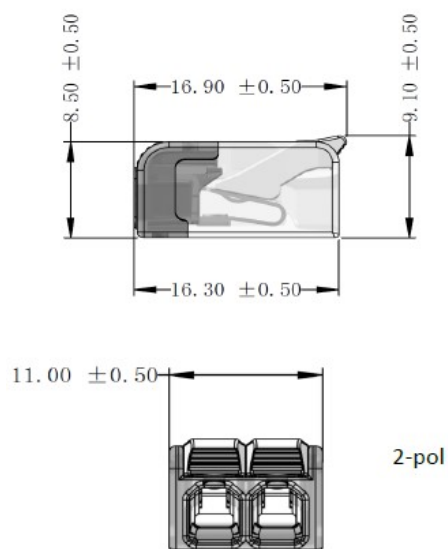

Technical Specifications

Material	Body: Polycarbonate Lever: Polyamid 66 Contact: Plated Copper Spring: Stainless Steel
Max Voltage	450V
Rating	24A
Operating Temperature	-20C to 100C
Cable Capacity	0.2-2.5mm ²
No. Poles	2
Stripping length	11mm
Suitable for:	Flexible/Fine-Stranded/Solid
Standards	IEC/EN 60998-1, 60998-2-2
Certification	VDE, CE, RoHS