## ndustrial Accessories




17508

Technical Specifications

**Dimensions** 

Wiring terminations

16A SURFACE APPLIANCE INLET 400v (50/60Hz) IP67

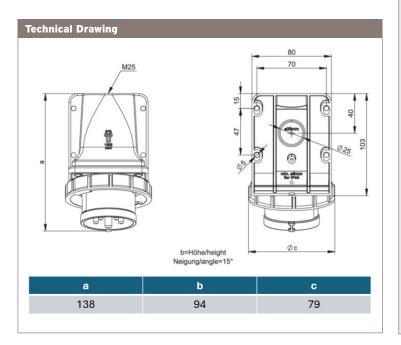

## Socket Colour Red 16A Rating Voltage 400v (50/60Hz) 4 pin (3P+E) Pin Configuration Clock Hour Position 6h Cable Entry 25mm threaded top (blanking plug supplied) 25mm k/o rear IP67 (when in use with IP67 **IP** Rating socket) Polyamide 6 (PA6) Material -25°C ~ 40°C **Ambient Temp** BS EN60309-1&2 Standards

See technical drawing

1-2.5mm flexible cable

1-4mm solid cable

@ 1Nm