




17521

32A SURFACE
APPLIANCE INLET
400v (50/60Hz)
IP67

Technical Drawing

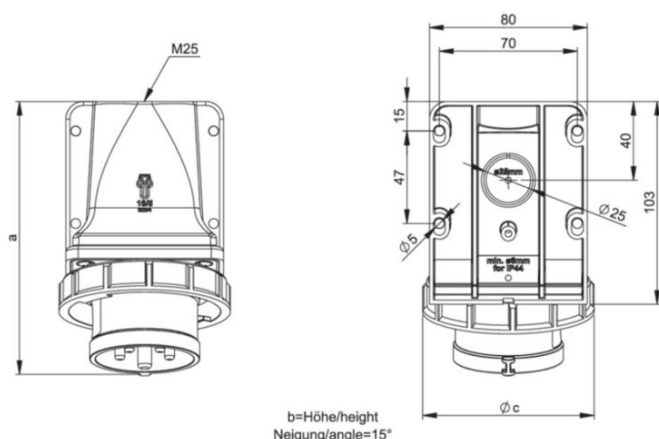

a	b	c
152	102	102

Technical Specifications

Socket Colour	Red
Rating	32A
Voltage	400v (50/60Hz)
Pin Configuration	5 pin (3P+N+E)
Clock Hour Position	6h
Cable Entry	25mm threaded top (blanking plug supplied) 25mm k/o rear
IP Rating	IP67 (when in use with IP67 socket)
Material	Polyamide 6 (PA6)
Ambient Temp	-25°C ~ 40°C
Standards	BS EN60309-1&2
Dimensions	See technical drawing
Wiring terminations	2.5-6mm flexible cable 2.5-10mm solid cable @ 1.1Nm