

## 17594


125A SURFACE  
APPLIANCE INLET  
400v (50/60Hz)  
IP67



### Technical Specifications

|                     |                                                                                           |
|---------------------|-------------------------------------------------------------------------------------------|
| Socket Colour       | Red                                                                                       |
| Rating              | 125A                                                                                      |
| Voltage             | 400v (50/60Hz)                                                                            |
| Pin Configuration   | 5 pin (3P+N+E)                                                                            |
| Clock Hour Position | 6h                                                                                        |
| Cable Entry         | 1 x 63mm threaded top<br>(blanking plug supplied)<br>50mm k/o rear<br>2 x 40mm k/o bottom |
| IP Rating           | IP67 (when in use with IP67 socket)                                                       |
| Material            | PC/ABS                                                                                    |
| Ambient Temp        | -25°C ~ 40°C                                                                              |
| Standards           | BS EN60309-1&2                                                                            |
| Dimensions          | See technical drawing                                                                     |
| Wiring terminations | 16-50mm flexible cable<br>16-70mm solid cable<br>@ 4.5Nm                                  |

### Technical Drawing

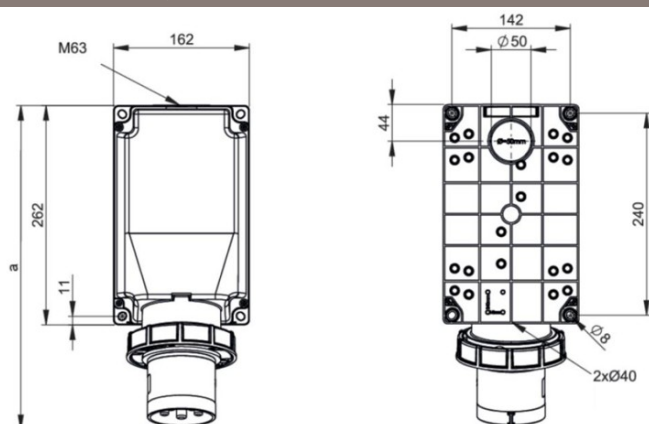

b = Höhe / height  
Neigung / angle = 15°

| a   | b   |
|-----|-----|
| 387 | 209 |