

niGLON™

Wiring Accessories


D-S132USB45-***

2 GANG - USB SWITCHED SOCKET OUTLET (TWIN EARTH)

VARIOUS FINISHES



Technical Drawing

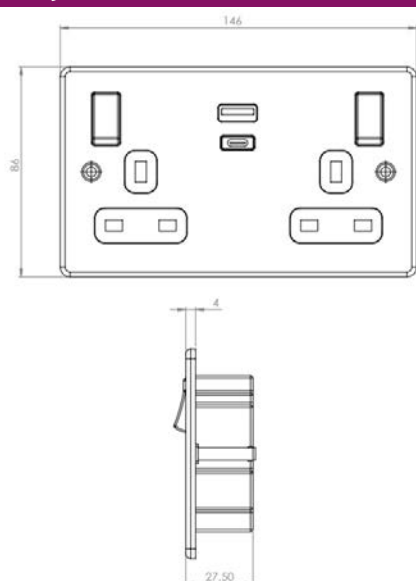

Technical Specifications

Products***

D-S132USB45-BCG	Brush Chrome - Grey Insert
D-S132USB45-BC	Brush Chrome - Black Insert
D-S132USB45-PCW	Polish Chrome-White Insert
D-S132USB45-ABB	Antique Brass - Black Insert
D-S132USB45-MBB	Matt Black - Black Insert

Front Plate	Stainless Steel
Rear Housing	Urea
Terminals	Brass
Earth Strap	Mild Steel
Terminal Screws	Steel & Yellow Passivated Silver "on-lay"
Contacts	Copper/Brass
Voltage	230V ~ 50Hz
Current Rating	13A
Terminal Size	5mm
Torque Value	1.6-1.8Nm
Cable Size	3x2.5mm ²
Back Box Depth	35mm min recommended
Twin Earth	Yes
USB Type	1xType A, 1xType C - Smart (45w total max)
Operational Temp	-5 ° to +40 °C
Standards	BS 1363-2: 1995 + A4: 2012