

niGLON™

Wiring Accessories


D-S132USB4C-***

2 GANG - USB SWITCHED SOCKET OUTLET (TWIN EARTH)

VARIOUS FINISHES



Technical Drawing

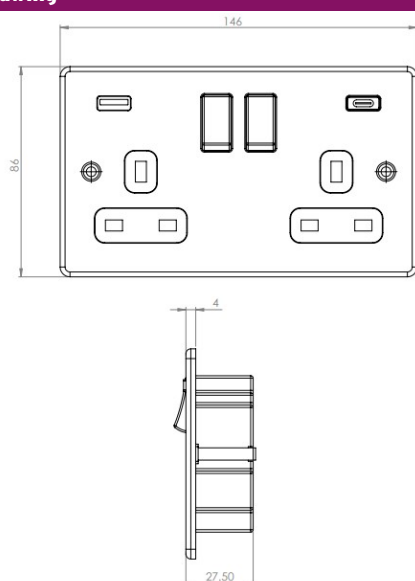

Technical Specifications

Products***

D-S132USB4C-BCG	Brush Chrome - Grey Insert
D-S132USB4C-BC	Brush Chrome - Black Insert
D-S132USB4C-PCW	Polish Chrome-White Insert
D-S132USB4C-ABB	Antique Brass - Black Insert
D-S132USB4C-MBB	Matt Black - Black Insert

Front Plate	Stainless Steel
Rear Housing	Urea
Terminals	Brass
Earth Strap	Mild Steel
Terminal Screws	Steel & Yellow Passivated
Contacts	Silver "on-lay"
Voltage	Copper/Brass
Current Rating	230V ~ 50Hz
Terminal Size	13A
Torque Value	5mm
Cable Size	1.6-1.8Nm
Back Box Depth	3x2.5mm2
Twin Earth	35mm min recommended
USB Type	Yes
Operational Temp	1xType A, 1xType C - Smart
Standards	(4.8A total)
	-5 ° to +40 °C
	BS 1363-2: 1995 + A4:
	2012