


A new take on traditional moulded wiring accessories manufactured in bright white Urea.

#### Technical Drawing

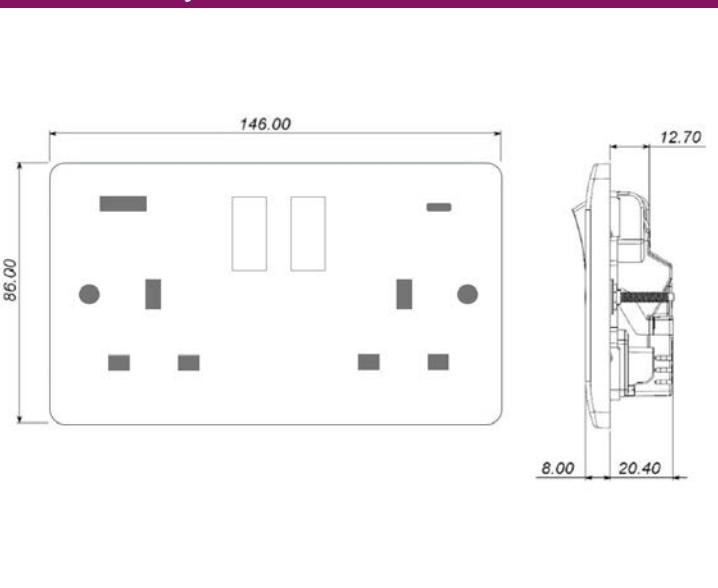

## NS132USB-4C

2 Gang DP Switched Socket  
Outlet with 2 USB Ports  
1xUSB A & 1 x USB C  
(4.8A total)

#### Technical Specifications

Materials	Front Plate - Urea Rear Housing - Nylon Terminals - Brass Terminal Screws - Steel & Yellow Passivated
Voltage	240V~ 50Hz
Current Rating	13A
Torque Value	1.8Nm
Cable Capacity	4 x 2.5mm <sup>2</sup>
Back Box Depth	25mm
USB Charging Output	5V DC, 4.8A (Total Shared) (A Max 2.4A) (C Max 3A)
USB Output Connector	USB Type "A & C"
Standby Current	2mA
Anti Microbial Certified	Yes
Warranty	20 Years
IP Rating	IP20
Operational Temperature	-5 to +40 C
Standards	BS1363-2:2023, BS EN 62368 EMC 2014/30/EU
No. Poles Switched	Double Pole Yes