
niGLON™

Wiring **Accessories**


METALLIC

S132RCDM-P

13A Type A RCD Double Pole 2 Gang Switched Socket Passive (Latching)

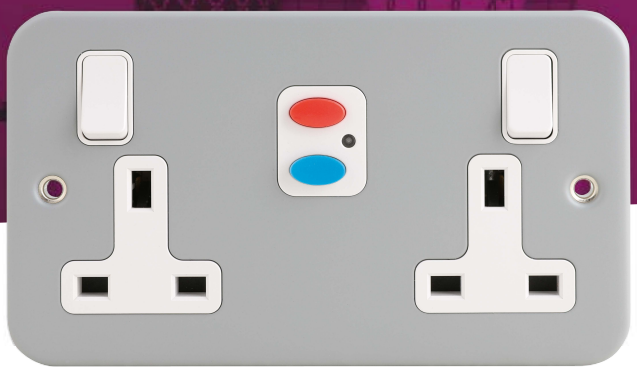

Technical Drawing

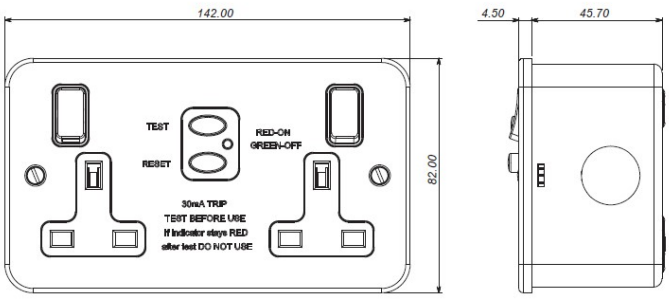

Technical Specifications

Material	Mild Steel
Finish	Satin Silver epoxy powder coating
Voltage	240V ~
Rated Current	13A
Frequency	50/60Hz
No. Gangs	2 Gang
Socket Switching	Double Pole
Trip Isolation	Live and Neutral
Rated Trip Current	30mA
Trip Speed	40msec
Trip Function	Passive (Does not trip when power is lost)
Back box Depth	45mm (supplied)
Torque Requirement	1.8Nm
Terminal Capacity	3 x 2.5mm2, 2 x 4mm2
Operating Temp	-5C to +40C
Standards	BS7288, BS1363-2
Certification	Intertek, CE, UKCA
Socket Status	LED Indicator RED:ON GREEN:OFF

E&OE. Whilst every care has been take in ensuring the accuracy of this document, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures, printed media or within any online presence.

0121 711 1990
sales@niglon.co.uk | www.niglon.co.uk

niGLON™