



Enclosed Switchfuses 3 Pole // GRP

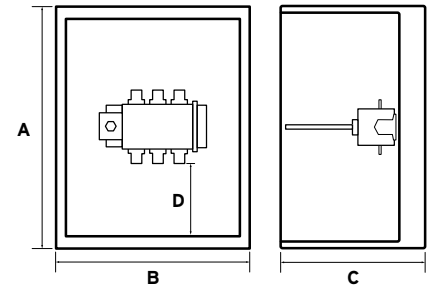



Part No.	Rated Current (A)	Fuselink Size	Terminal Size (mm)	Dimensions				Qty
				A (mm)	B (mm)	C (mm)	D (mm)	
PC323PSF	32	A2 - A3	-	400	400	210	146	1
PC633PSF	63	A2 - A3	-	400	400	210	146	1
PC1003PSF	100	A4	M8x25	500	400	210	129	1
PC1253PSF	125	A4	M8x25	500	400	210	129	1
PC1603PSF	160	B1 - B3	M10x30	500	400	210	129	1
PC2003PSF	200	B1 - B3	M10x30	700	500	300	150	1
PC2503PSF	250	B1 - B3	M10x30	700	500	300	150	1
PC3153PSF	315	B1 - B3	M10x40	700	500	300	150	1
PC4003PSF	400	B1 - B4	M10x40	700	500	300	150	1
PC6303PSF	630	C1 - C2	M12x40	800	600	300	240	1
PC8003PSF	800	C1 - C3	M12x40	800	600	300	240	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

Specifications //

- Standard of Compliance Enclosure - EN 62208
- Standard of Compliance Switch - EN 60947-3
- IP Rating - IP65 (internal fixing system)
- Material - Glass fibre reinforced polycarbonate
- Impact Resistance - IK10
- RAL - 7035
- UV Resistance - UL508
- Handle - Accepts up to 3 padlocks and is defeatable
- Terminal Shroud - Fitted on all main terminals
- BS88 Fuselinks - Sold separately

Enclosed Switchfuses 3 Pole // Mild Steel

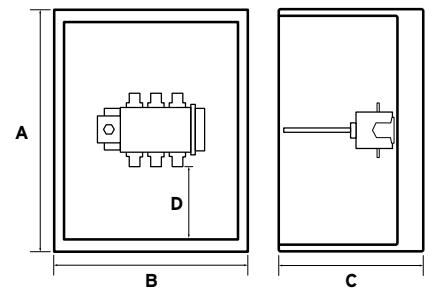

Part No.	Rated Current (A)	Fuselink Size	Terminal Size (mm)	Dimensions				Qty
				A (mm)	B (mm)	C (mm)	D (mm)	
MS323PSF	32	A2 - A3	-	400	400	200	146	1
MS633PSF	63	A2 - A3	-	400	400	200	146	1
MS1003PSF	100	A4	M8x25	400	400	200	129	1
MS1253PSF	125	A4	M8x25	400	400	200	129	1
MS1603PSF	160	B1 - B3	M10x30	400	400	200	129	1
MS2003PSF	200	B1 - B3	M10x30	500	400	250	150	1
MS2503PSF	250	B1 - B3	M10x30	500	400	250	150	1
MS3153PSF	315	B1 - B3	M10x40	500	500	200	150	1
MS4003PSF	400	B1 - B4	M10x40	500	500	200	200	1
MS6303PSF	630	C1 - C2	M12x40	1000	600	300	440	1
MS8003PSF	800	C1 - C3	M12x40	1000	600	300	440	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

Specifications //

- Standard of Compliance Enclosure - EN 61439-1
- Standard of Compliance Switch - EN 60947-3
- IP Rating - IP65 (polyurethane gasket)
- RAL - 7035
- Finish - Epoxy powder paint
- Gland Plate - Bottom entry
- Comes with - Wall mount brackets and double bit lock
- Handle - Accepts up to 3 padlocks and is defeatable
- Terminal Shrouds - Fitted on all main terminals
- BS88 Fuselinks - Sold separately