


niglon Control & Automation

MOTOR CONTROL GEAR

STANDARD 4 POLE CONTACTOR AC COIL

4SC135

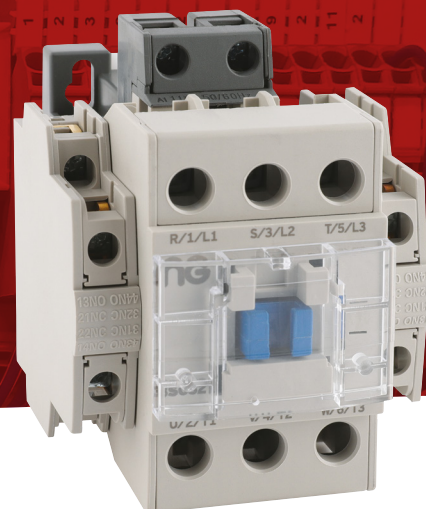

4 pole contactors are for switching resistive loads, such as lighting or heating. Front or side auxiliary contacts are optional. Din rail mounting.

General Characteristics

Standards	IEC 60947-4, UL-508
AC-1 Rated Load	135A
AC-3 Rated Power @ 415V	45kW
Rated Operational Voltage (Ue)	≥ 690V
Number of Main Poles	4
Maximum Operation Frequency	1200 per hour
Mechanical Endurance	10 000 000 ops
Electrical Endurance	2 000 000 ops
Width	103mm
Height	124mm
Depth	118mm
Terminal Capacity	10 - 50mm ²
Tightening Torque	5 Nm
Weight	1.7 Kg


Coil Characteristics

Available Coil Voltages	24VAC, 110VAC, 230VAC
Inrush Current	220 VA
Sealed Current	17 VA
Pull-in Voltage	80 - 110 %
Thermal Dissipation	5 W
Closing time	16 - 25 ms


Available Accessories

AUX0/2FM	Auxiliary Contact 2NC
AUX1/1FM	Auxiliary Contact 1NO/1NC
AUX0/4FM	Auxiliary Contact 4NC
AUX1/3FM	Auxiliary Contact 1NO/3NC
AUX2/2FM	Auxiliary Contact 2NO/2NC
AUX3/1FM	Auxiliary Contact 3NO/1NC
AUX4/0FM	Auxiliary Contact 4NO
AUX0/1SM	Auxiliary Contact 1NC side mount
AUX1/0SM	Auxiliary Contact 1NO side mount
4PM135	Mechanical Interlock

Technical Drawing

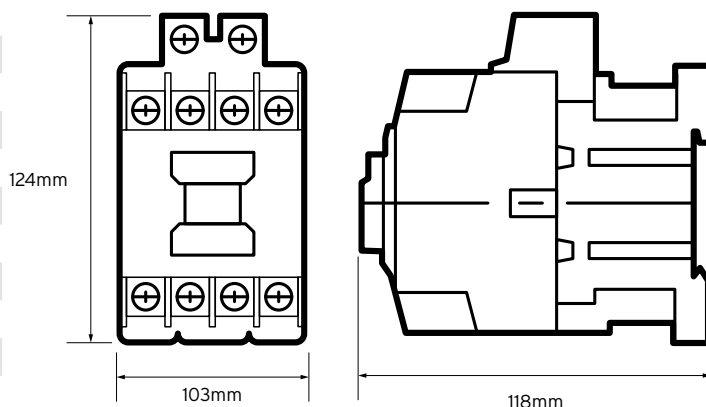

Wiring Diagram

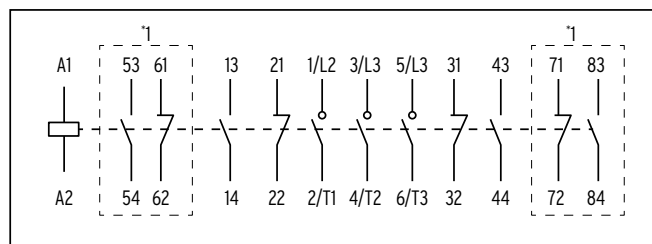

*1 - Optional auxiliary contact unit

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.