
NiGLON Circuit **Protection**

TPNB08 B Type Boards 125A - 415V AC (Excluding Incomer)

3

0

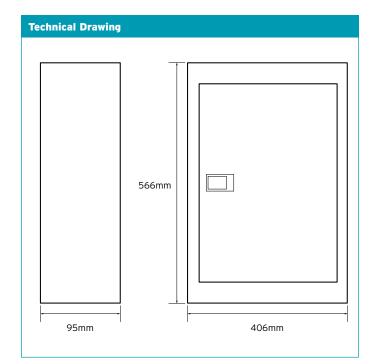

L3

VIAIN SWITCH

0N 0 OFF

ð

4

| Technical Specifications | | |
|--------------------------|--------------------------|--|
| Number of Ways | 8 | |
| Amp Rating | 125A - 415V AC | |
| Panel Gauge | 1.2mm | |
| Epoxy finish | RAL 7035 | |
| Dimensions | 406 x 95 x 566mm (WxDxH) | |
| IP Rating | IP2X | |
| Standards of Compliance | BS EN 61439-3 | |
| Certified | intertek (S | |
| Mounting | Surface | |

| Devices | Recommended Minimum Torgue (Nm) | Cable Capacity (mm²) |
|-------------------------|------------------------------------|-------------------------|
| MCBs | 2.0Nm | 25 |
| RCDs/RCCDs | 2.5Nm | 25 |
| RCBOs | 2.0Nm | 16 |
| Main Switch/Incomer | 2.5Nm | 35 |
| Earth/Neutral terminals | 2.5Nm | 16 |
| Bolts/Nuts | 5.0Nm | - |

NiGLON

E&OE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.

0121 711 1990 sales@niglon.co.uk | www.niglon.co.uk