
NiGLON Wiring **Accessories**

NSP20DP 20A Double Pole Switch

A new take on traditional moulded wiring accessories manufactured in bright white Urea.



recinical Specifications	
Material Composition	Front Plate & Rocker Switch - Urea Rear Housing - Nylon & Urea Terminals - Brass, Terminal Screws - Steel & Yellow Passivated Internal Mechanism - Formed Press Brass Silver "on-lay" Copper / Brass Contacts
Voltage	240V~ 50Hz
Current Rating	20A
Terminal Size	5mm ø
Torque Value	1.8Nm
Cable Size	4 x 2.5mm ²
Double Pole	Yes
Twin Earth	Yes
Back Box Depth	35-47mm
Warranty	20 Years
Anti Microbial Certified	Yes
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	The Low Voltage Directive 2006/95/EC BS EN 60669-1:1999 + A1:2002 + A2:2008 Modified ISO 22196
Dimensions	86x86x9.5mm (HxWxD)

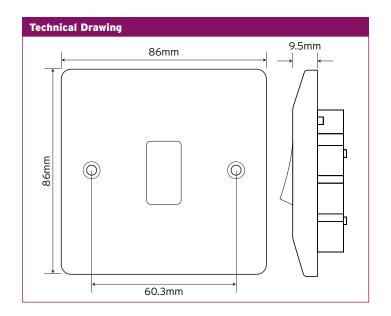

E&OE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence. O121 711 1990 sales@niglon.co.uk | www.niglon.co.uk

Technical Specifications

